

HSC

CORSE TRAVELS VERFAHRWEGE COURSES	Longitudinale • Longitudinal Langs • Longitudinale	mm inch	1100 ÷ 2600 43 ÷ 102
	Trasversale • Cross Quer • Transversal	mm inch	640 • 800 25 • 32
	Verticale • Vertical Senkrecht • Verticale	mm inch	600 • 700 24 • 28

AVANZAMENTI FEEDS VORSCHÜBE AVANCES	Rapidi • Rapids Eilgang • Rapides	XY	mm/1' ipm	0 ÷ 60000 0 ÷ 4724
	Rapidi • Rapids Eilgang • Rapides	Z	mm/1' ipm	0 ÷ 40000 0 ÷ 4724
	Di lavoro • Work Arbeitsgang • De Travail	XY	mm/1' ipm	0 ÷ 30000 0 ÷ 2362
	Di lavoro • Work Arbeitsgang • De Travail	Z	mm/1' ipm	0 ÷ 20000 0 ÷ 2362
	Accelerazioni max • Max Accelerations Max Beschleunigung • Acceleration Maxi		mm/sec ² ipm/sec ²	15000 590

MANDRINO SPINDLE SPINDEL BROCHE	Potenza costante • Rated output Konstante Leistung • Puissance constante	kW	29	30	41
	Coppia massima • Max torque Max Drehmoment • Couple max	Nm	117	59	175
	Velocità massima • Max speed Max Drehzahl • Vitesse max	g/1' rpm	20000	22000	15000

TAVOLA TABLE TISCH TABLE	Superficie tavola • Working surface Frästisch Ausspannfläche • Surface utile	mm inch	1700 ÷ 3200 x 600 67 ÷ 126 x 24
	Carico ammesso • Load admitted Belastung • Charge admis	Kg Lbs	5000 11000

CAMBIO UTENSILI TOOL CHANGER WERKZEUGWECHSEL CHANGEUR D'OUTILS	Automatico - capacità Automatic - capacity Automatisch - Ladekapazität Automatique - capacité	Utensili Tools Werkzg. Outils	20 ÷ 128
---	--	--	----------

POTENZA INSTALLATA • INSTALLED POWER ANSCHLUßLEISTUNG • PUISSANCE INSTALLÉE	kVA	45
--	-----	----


PESO • WEIGHT GEWICHT • POIDS	kg Lbs	8500 ÷ 12000 19000 ÷ 27000
----------------------------------	-----------	-------------------------------




HSC



Testa verticale con motorspindle
Vertical milling head with motorspindle
Vertikal Fräskopf mit Motorspindel
Tête verticale avec moteur-brèche

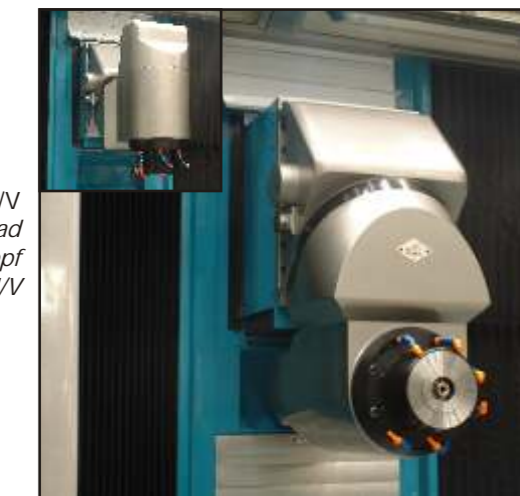


Testa O/V
H/V milling head
W/S Fräskopf
Tête H/V

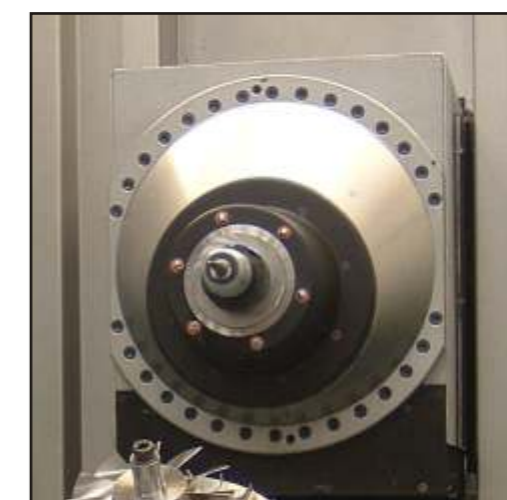


Motorspindle orizzontale
Horizontal motorspindle
Waagrecht Motorspindel
Moteur-brèche horizontale




Per lavorazione pezzi gemelli
For machining twin pieces
Für Bearbeitung Zwilling's Stücke
Pour usinage de pièces jumeaux

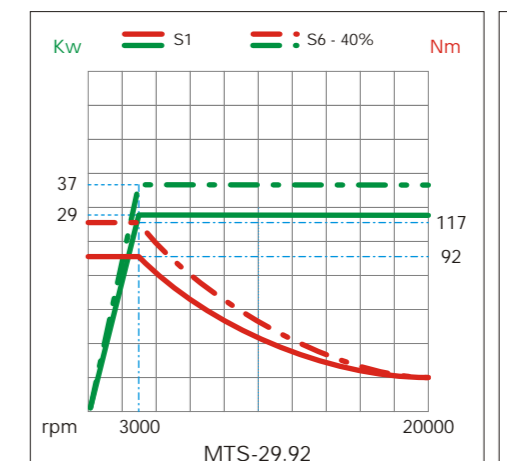

Motore AC sincrono • Synchronous-motor
Synchron-Motor • Moteur synchrone

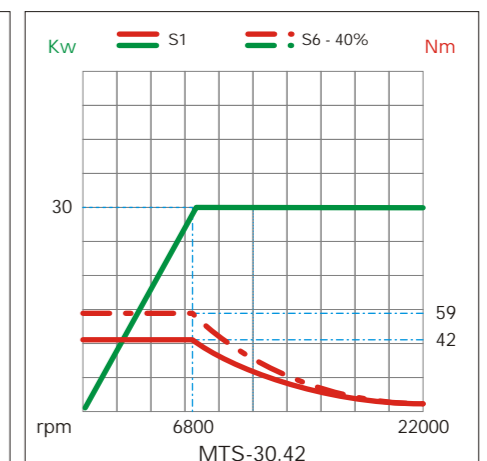

Motore AC sincrono • Synchronous-motor
Synchron-Motor • Moteur synchrone

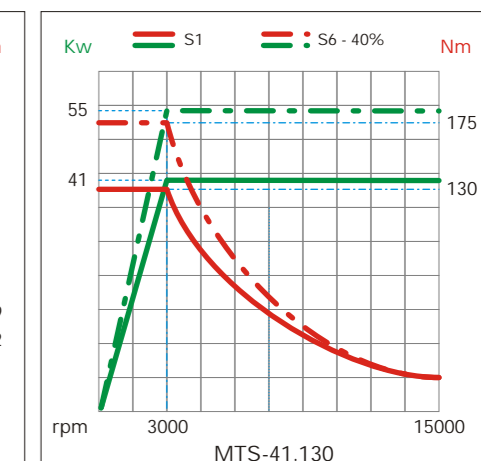


Motore AC sincrono • Synchronous-motor
Synchron-Motor • Moteur synchrone

PARPAS S.p.A. (Unità Locale Torino)
Via Reiss Romoli 298
10148 Torino
Tel 011 2200206 • Fax 011 2296713
piemonte@parpas.com




PARPAS AMERICA INC.
430 Pellissier Street - Suite 405
Windsor, ONT. N9A 4K9 CANADA
Tel. +1-800-831 9092 • Fax +1-734-462 9244
sales@parpasamerica.com


PARPAS AMERICA CORP.
36030 Industrial Road
Livonia, MI 48150 USA
Tel. +1-734-462 0204 • Fax +1-734-462 9244
sales@parpasamerica.com

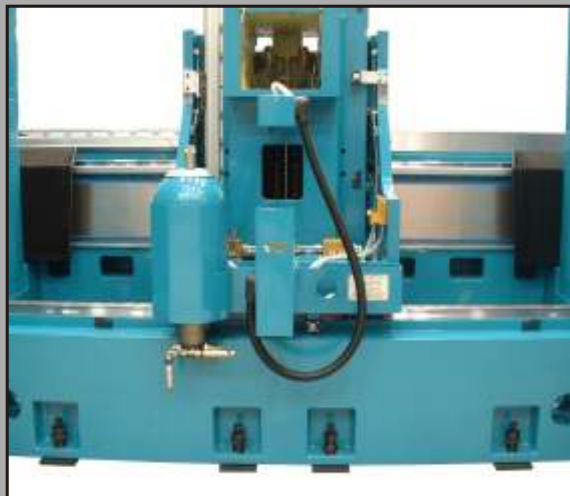

Movimento XY con motore lineare
 XY travels with linear motor
 XY Fräsweg mit Linear-Motoren
 Course XY avec moteurs linéaires

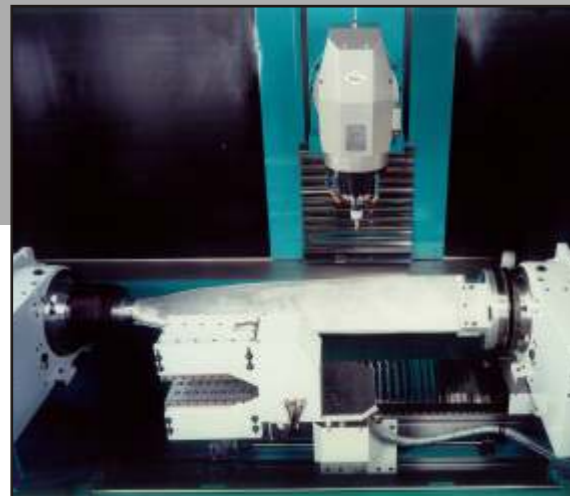

Speciale per industria aerospaziale
 Special configuration for aerospace
 Sonderausführung für Raumfahrtindustrie
 Configuration spéciale pour l'industrie aéronautique

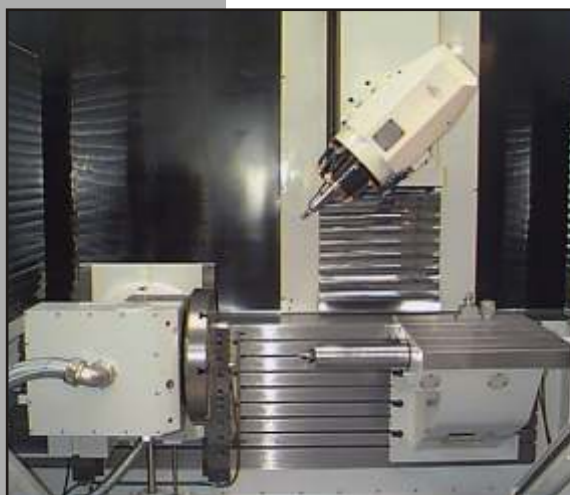

Divisore girevole e basculante per lavorazioni a 4 / 5 assi.
 CN rotary and tilting table for 4 / 5 axes machining.
 NC Teilgerät, schwenkbar, zur 4 / 5 Achsen-Bearbeitungen
 Diviseur tournant et basculant pour usinage à 4 / 5 axes.



Testa speciale per lavorazione di palette
 Special milling head for blade machining
 Schwenk-Fräskopf zur Bearbeitung von Schaufeln
 Tête spéciale pour usinage d'aubes



Magazzino utensili
 Tools magazine
 Werkzeug-Magazin
 Changeur d'outils



Tavola girevole integrata
 Integrated rotary table
 Integrierter Rundtisch
 Table tournante intégrée



Versione orizzontale per lavorazioni a 5 assi
 Horizontal configuration for 5-Axes machinings
 Waagerechte ausführung zur 5 Achsen Bearbeitung
 Version horizontale pour usinage à 5 axes



Tavola girevole Up&Down
 Rotary table with up-down movement
 Vertikal verfahrbarer Rundtisch
 Plateau tournante avec course verticale